

SP-TTL Speed Sensor

Magnetic speed pickup with conditioned output

Up to

- 2,000 Hertz

Output

- 0 - 5 volt square wave

The SP-TTL speed sensor is capable of detecting passing ferrous objects including a gear tooth to enable shaft speed to be calculated.

The unit conditions the signal to provide a 0 - 5 volt square wave output. This enables it to be connected direct to panel meters or the Webtec C2000. It is all housed in a robust housing and comes complete with lock nuts for easy mounting and adjustment.



*DHM 3 Series Digital
Hydraulic Multimeter*

Manufacturers of hydraulic components and test equipment
for the Mobile, Industrial and Agricultural industries



WEBTEC

WEBSTER INSTRUMENTS

1290 E. Waterford Ave.

Milwaukee, WI 53235

Tel: (414) 769-6400

Fax: (414) 769-6591

www.webster-inst.com

E-mail: sales@webster-inst.com

Features

- Wide range 1 - 2000 Hertz
- Steel and aluminium housing
- 0 - 5 volt square wave output
- Two lock nuts provide
- M12 4 pin connection



SPTTL-BU-USA-2528.pdf
(Issue 1)

04/10

Specifications

Model number	Output	Frequency range
SP-TTL	Pulse	1 - 2000 Hertz

Functional specification

Operating temperature: Ambient - 5 to 40°C (41 to 104°F)
Weight: 0.25kg (0.55 lbs)

Electrical specification


Supply voltage (VS): 12 - 32 VDC
Pulse output: 0 - 5 V square wave
Connection type: M12 x 1 4 pin

Construction material


Main Body -steel 212A42 electroless nickel plated,
 Lid - Aluminium 2011 T3
 Treaded section - 212A42 electroless nickel plated

Installation and connection details

Dimensions in mm (inches)

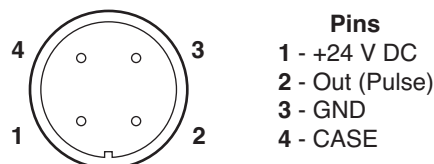

Connecting cable (5m) FT9879-05
Extension cable (5m) FT10229-05
Connector (M12x1 4 pin) FT9880

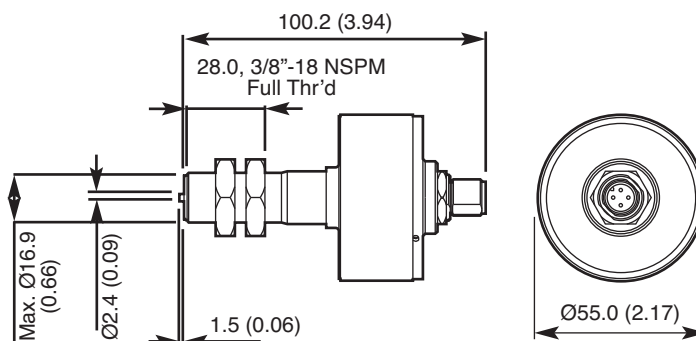

Installation guidance

When using the sensor to detect a gear tooth, there is an optimum shape to achieve maximum output voltage from the sensor before conditioning. This relationship is as follows:

A is equal to or greater than 2.3mm
 B is equal to or greater than C
 C is equal to or greater than 7mm
 D is as close as possible
 E is equal to or greater 2.3mm

The above configuration is usually not available in a stock gear, but it is not necessary to have the maximum output into the conditioning. Conventional stock gears can be used if the tooth width A is equal to or greater than 2.3mm and C is 3.5mm. For ease of alignment, it is recommended that the gear thickness should be at least 5mm.

When using the sensor to detect a bolt head or other ferrous object, as a 'detecting head' the following should be considered:
 Use only solid material - filled cap head bolts can give a double count
 Keeping the detecting head thin between 1.5 and 2mm will give the greatest speed range
 The maximum velocity of the detecting head should not exceed 25 m/s
 Ensure the detecting head provides the only edges within 10mm of the sensor

Accessories

A range of panel meters are available please contact the sales office for help and advice on your application.

Magnetic Sensor

A = Dimension of top of tooth
 B = Height of tooth
 C = Space between teeth
 D = Clearance
 E = Gear thickness

