



# SHOP PRESS

## C Frame 25 Tons Press

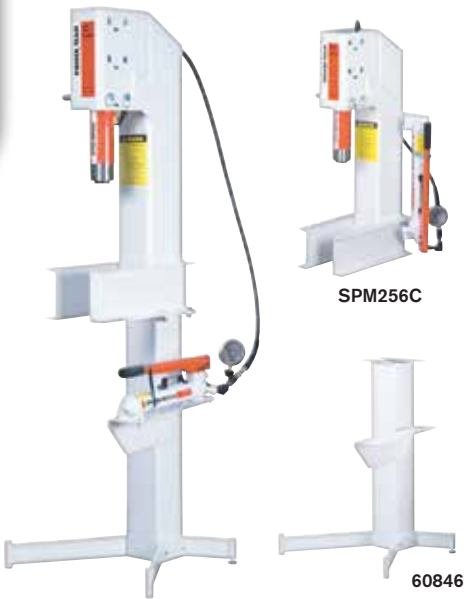

- Can be bench mounted or on optional pedestal base.
- Bench mount requires less than 1.5 sq. ft. of space; on optional pedestal, only 4 sq. ft. of floor space is needed.
- Open-End-Access™ design makes loading and unloading of work easy.
- Cylinder head adjusts to three convenient working positions, providing up to 20 1/4" of "daylight."
- Hydraulic cylinder delivers a 6 1/4" stroke and is driven by a P59 two-speed hand pump.

**Pedestal Base No. 60846** – Provides a stable base for SPM256C. Includes a bracket for mounting the pump on the side of pedestal press. Wt., 76 lbs.

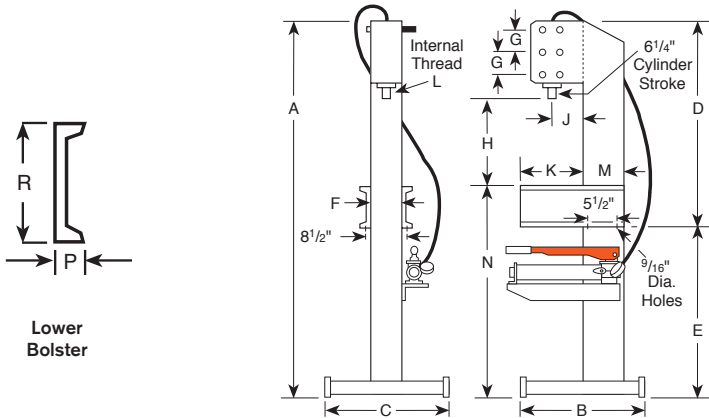

### DIMENSIONS

A	B	C	D	E	F	G	H (Cyl. Retracted)	J	K	L	M	N	P	R	Floor Space
(in)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)	(in.)
77 5/8	24 1/2	24	41 5/8	36	6	5	10 1/4, 15 1/4, 20 1/4	6 1/2	12 1/2	1 1/2 – 16	8	43	2	7	24 x 24 1/2

### ORDERING INFORMATION

Capacity (tons)	Type Cyl. Used	Stroke	Cyl. Model	Order No.	Speed** Advance	Pressing	Type Pump	Pump Model	Prod.Wt. (lbs).
25	Single-Acting	6¼"	C256C	SPM256C*	.129 in./stroke	.03 in./stroke	Hand	P59	240
25	Single-Acting	6¼"	C256C	SPX256C*	.129 in./stroke	.03 in./stroke	—	—	240

\* SPM256C and SPX256C does not include No. 60846 pedestal base.

\*\* Typical performance based on pump specifications. Actual speeds may vary with operating conditions.