

SPREADERS

Hydraulic
1-1½ Ton



HS2000
(Forged Steel)

THE HYDRAULIC PRY BAR!

- Use to lift machines or as a clamp; spread concrete forms or rebar or perform straightening jobs.
- Conforms to ASME B30.1 standard.
- High strength alloy steel forged upper and lower jaws on HS2000.
- Jaws are spring-return; retract automatically when pressure is released.

No. HS2000 – 1-ton capacity spreader. Full 2,000 lbs. capacity at 10,000 PSI with 4" spread. Can be "dead-ended" at


4" spread under full load. Needs only 9/16" clearance to engage jaws.

No. HS3000 – 1½-ton capacity spreader. Full 3,000 lb. capacity at 10,000 psi. with 11½" spread. Greater than competitive units. Needs only 1¼" clearance to engage jaws. Can be "dead-ended" at 11½" spread at full load.

HS3000
(High Grade Ductile Iron)



Tested to conform to ASME B30.1 standard

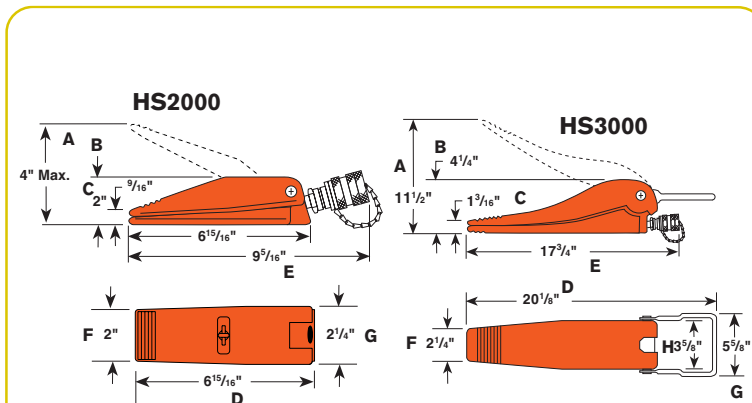

Cap. (tons)	Max. Spread (in.)	Order Number	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	H (in.)	Oil Capacity (cu. in.)	Min. Clearance Required (in.)	Weight (lbs.)
1	4	HS2000	4	2	9/16	6 15/16	9 5/16	2	2 1/4	—	.63	9/16	4.8
1½	11½	HS3000	11½	4¼	1 3/16	20 1/8	17 3/4	2¼	5 5/8	3 5/8	3.5	1¼	22

HS2000 SPECIFICATIONS

Maximum rated capacity.....1 ton @ 10,000 psi
 Maximum spread.....4"
 Minimum clearance required.....9/16"
 Cu. in. oil required63

HS3000 SPECIFICATIONS

Maximum rated capacity..... 1½-ton @ 10,000 psi
 Maximum spread..... 11½"
 Minimum clearance required..... 1¼"
 Cu. in. oil required 3.50

HYDRAULIC TOOLS

