




5" Electric Sight/Level Gauge

HSG-77-5-EL SERIES

Electric Sight/Level Gauge generates an electric signal when the oil level drops to a minimum. Also has visual reading.

Transparent polyamide technopolymer is highly resistant to shock, solvents, oils with additives, aliphatic and aromatic hydrocarbons, petro, naphtha, and phosphoric esters*.

*Avoid contact with alcohol and detergents containing alcohol.

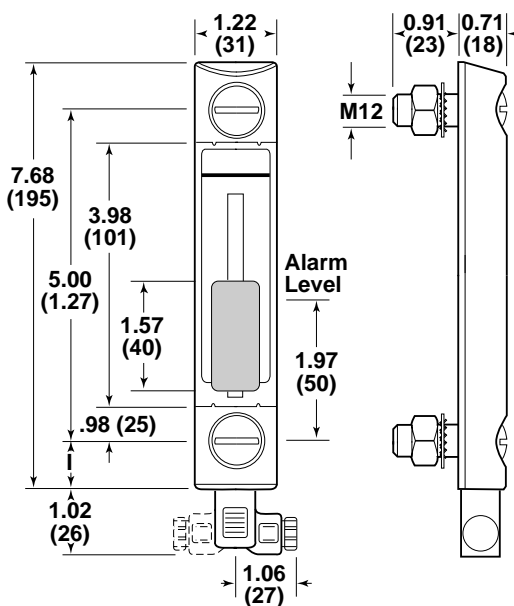

elesa® ORIGINAL DESIGN

Sight Level Gauge*



Available in black powder coat, add B to end of part number


PART NUMBER HSG-55

The Hydro-Craft® Standard Sight Level Gauge is available only with temperature indicator. Complete with neoprene gaskets and attaching bolts — ready for immediate installation.

- Can be installed from either outside or inside reservoir unit. Requires only two mounting holes
- Sturdy low profile outer case
- All external metal parts are plated
- Extra large sight area
- Non-breakable 2X magnifier
- Thermometer standard with readings in Centigrade and Fahrenheit
- Will withstand temperatures to 225°F
- Available in stainless steel, add "SS" to end of part number

*Sight Level gauges are not designed for/cannot be used for pressurized applications.

TECHNICAL DATA FOR SIGHT LEVEL GAUGES

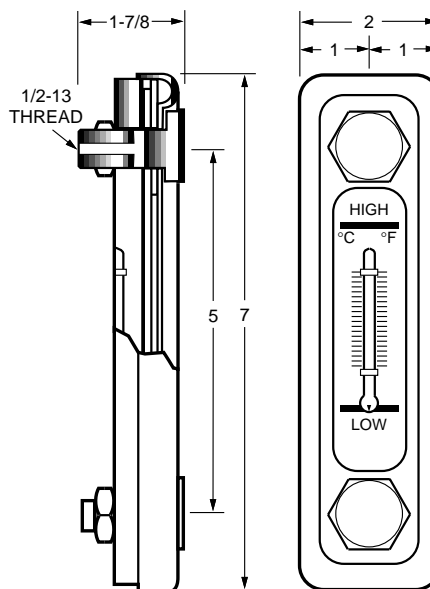

Drill 9/16" Hole 2 Places on 5" Center

All dimensions are approximate in inches