


D07 Standard Flow Parallel Circuit Manifold

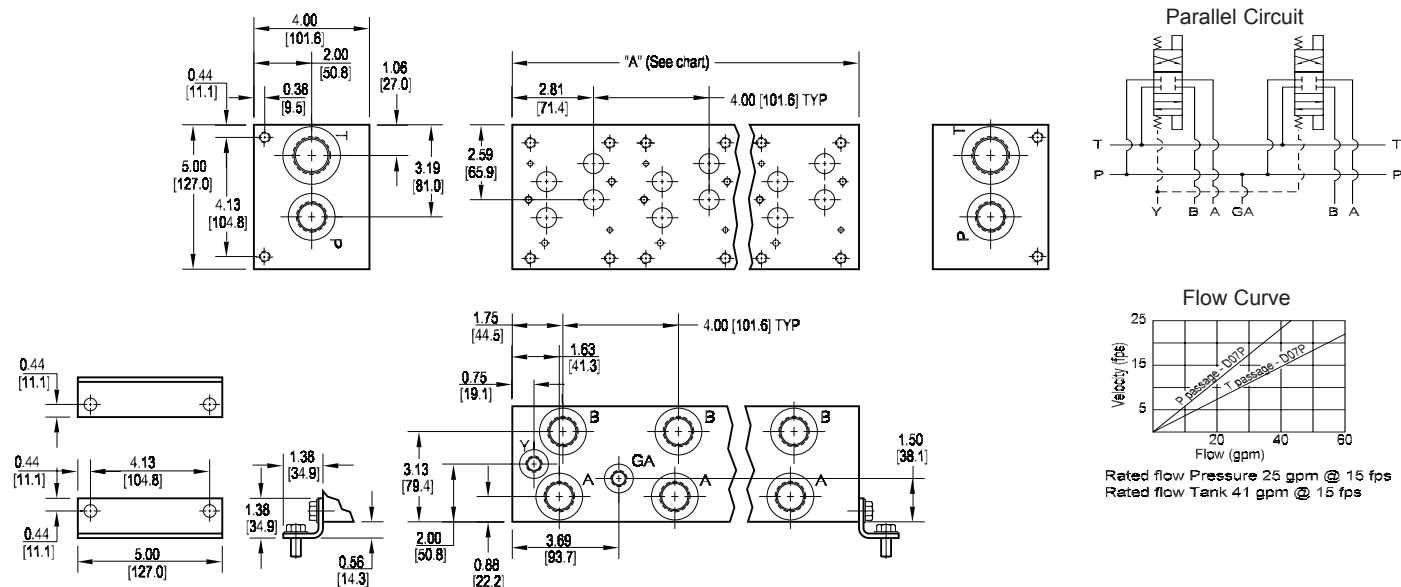

All mounting hardware is supplied.
See page 63 for itemized list.

No. of stations	* 01	02	03	04	05	06	07	08
"A" length (code 4 spa.) inch [mm]	4.00 [101.6]	8.00 [203.2]	12.00 [304.8]	16.00 [406.4]	20.00 [508.0]	24.00 [609.6]	28.00 [711.2]	32.00 [812.8]
apx. weight alum lb [kg]	6 [3]	14 [6]	22 [10]	30 [14]	38 [17]	46 [21]	52 [24]	60 [27]
apx. weight iron lb [kg]	24 [11]	46 [21]	69 [31]	90 [41]	114 [52]	135 [61]	158 [72]	180 [82]

* Length of 01 sta. with "C" relief cavity 5.50 [139.7]. Gauge port not available on 01 station.

Port code	Valve mtg.	Manifold mtg.
P, S	0.38-16 UNC x 1.00 [25] DP 0.25-20 UNC x 0.75 [19] DP	0.38-16 UNC x 0.75 [19] DP
B, M, T	M10 ISO 6H x 1.00 [25] DP M6 ISO 6H x 0.75 [19] DP	M10 ISO 6H x 0.75 [19] DP

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.
Download latest catalog page revisions at www.daman.com.

Ordering Information



Material		Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	/	Options																																				
Material A Aluminum - 6061-T6 3000† psi • 20.7 MPa D Ductile Iron - D4512 5000† psi • 34.5 MPa N Electroless Nickel Coated Ductile Iron - D4512 5000† psi • 34.5 MPa † Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		Valve Pattern D07 ISO 4401-07-06 NFPA T3.5.1-D07 See Tech Information	Circuit P Parallel Manifold Standard Flow	No. of Stations Aluminum 01...08 Available with spacing code 4 Ductile Iron 01...08 Available with spacing code 4	Valve Spacing 4 4.00 inch 101.6 mm	Port Threads <table><thead><tr><th></th><th>P,A,B</th><th>T</th><th>Y</th><th>X optional</th><th>GA</th></tr></thead><tbody><tr><td>P</td><td>NPTF • ANSI B1.20.3</td><td>0.75</td><td>1.00</td><td>0.38</td><td>0.25</td></tr><tr><td>S</td><td>SAE • ISO 11926</td><td>-12</td><td>-16</td><td>-6</td><td>-4</td></tr><tr><td>B</td><td>BSPP • ISO 1179</td><td>0.75</td><td>1.00</td><td>0.38</td><td>0.25</td></tr><tr><td>M</td><td>ISO • ISO 6149</td><td>M27</td><td>M33</td><td>M14</td><td>M10</td></tr><tr><td>T</td><td>BSPT • ISO 7</td><td>0.75</td><td>1.00</td><td>0.38</td><td>0.25</td></tr></tbody></table>		P,A,B	T	Y	X optional	GA	P	NPTF • ANSI B1.20.3	0.75	1.00	0.38	0.25	S	SAE • ISO 11926	-12	-16	-6	-4	B	BSPP • ISO 1179	0.75	1.00	0.38	0.25	M	ISO • ISO 6149	M27	M33	M14	M10	T	BSPT • ISO 7	0.75	1.00	0.38	0.25		Options See next page for available options and ordering codes.
	P,A,B	T	Y	X optional	GA																																							
P	NPTF • ANSI B1.20.3	0.75	1.00	0.38	0.25																																							
S	SAE • ISO 11926	-12	-16	-6	-4																																							
B	BSPP • ISO 1179	0.75	1.00	0.38	0.25																																							
M	ISO • ISO 6149	M27	M33	M14	M10																																							
T	BSPT • ISO 7	0.75	1.00	0.38	0.25																																							

Options - D07 Standard Flow Parallel Manifold

Contact Daman or consult web
CADalog for cavity locations if critical.

Valve cavity location when
cavity, or cavity-isolation
combination L or D is specified.


Valve cavity location for cavity-
isolation combination R or D.

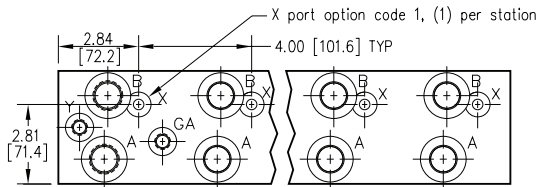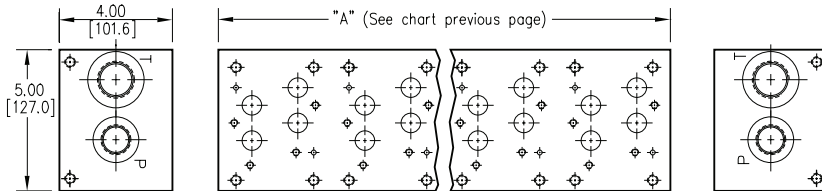


Parallel Circuit with Cavity

Parallel Circuit with Isolations


Cavity & Isolation Combinations

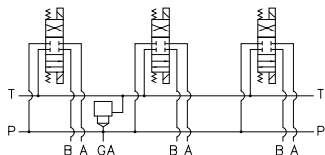

Valves with P in the nose and T out the
side must be used.

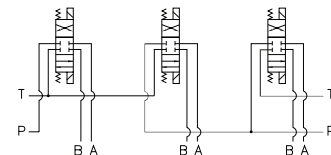

Manifold shown with P isolation between 1
& 2 (PA), and T isolation between 2 & 3 (TB).

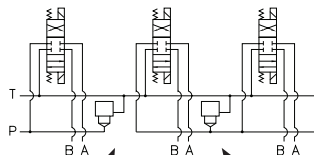

Option code L
Cavity left of isolation
Option code R
Cavity right of isolation
Option code D includes both cavities


ISOLATIONS

Daman isolation options allow a manifold
to have two independent pressure and/or
tank ports. Isolations are drilled rather
than plugged to ensure a leakproof and
failproof isolation.

Ordering code letter:	* Isolation is between stations:	Available # of stations:
A	01 & 02	02-08
B	02 & 03	03-08
C	03 & 04	04-08
D	04 & 05	05-08
E	05 & 06	06-08
F	06 & 07	07-08
G	07 & 08	08

* Stations are numbered left to right.

Parallel Circuit with X

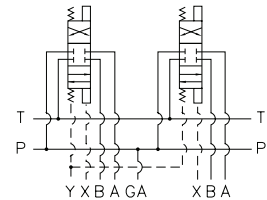

NOTES:

- 1) The GA port is not available
on a (1) station manifold.
- 2) The GA port is not available
when a pressure isolation is
located between stations 1 & 2.
- 3) Some cavity and isolation
combinations are not possible.
Consult factory to determine
availability.

Ordering Information

...	Pilot Ports	Cavity	Pressure Isolation	Tank Isolation	Cavity & Isolation Combinations
-----	-------------	--------	--------------------	----------------	---------------------------------

Pilot Ports	
Omit if X ports not required	
1	X port ISO 4401-07-06 NFPA T3.5.1-D07

Cavity	
Omit if cavity not required	
C	Common cavity: With solenoid clearance. C-10-2 (P in nose)
S	Sun Cavity: T-3A (P in nose) See Tech Info for valves.

Tank Isolation	
Omit if T isolation not required	
TA...TG	Available with spacing code 4

Cavity & Isolation Combinations	
Specify when using a combination of cavity and isolation options. Cavities do have solenoid clearance.	
L	Relief cavity is located left of the isolation.
R	Relief cavity is located right of the isolation.
D	Two relief cavities, one each side of isolation.

Pressure Isolation	
Omit if P isolation not required	
PA...PG	Available with spacing code 4