Hydraflow

HYDRAFLOW SL COOLER

The Hydraflow SL Hydraulic Cooler is designed with a narrow profile to fit in very tight spaces.

Conveniently located oil fill point at the front of the unit simplifies oil filling and permits unit to be mounted underneath the cab saving valuable frame rail space.



Quick, easy access to filter

Convenient oil fill point

Two Sight Glasses (Oil, No Oil)

Narrowest Marrowest Marrow

Hydraflow is designed and assembled as a complete easy to install package.

Benefits include:

- Ideal for tractors with short wheelbases
- Maximum efficiency from hydraulic fan system
- Under 9" wide, the narrowest unit in its class
- Breather design recessed to reduces water contamination
- Rear mount with no flanges to break
- Two conveniently located sight glasses one empty and one full always shows correct oil level

Narrowest unit in its class





Hydraflow_m



Perfect for "Behind the Cab" mounting


FEATURES

- Reservoir 2-1/2 gallon
- Flow rate up to 25 gallons per minute
- Pressure 3000 psi
- High pressure 3/4" JICM "IN" 3/4" JICM "OUT"
- Low pressure return 1" JICM
- Suction 1-1/2" Code 61
- Drain connection 1/2"
- Weight 85 lbs. Dry

HYDRAFLOW™ APPLICATIONS

- Chemical transports
- LP Bobtails
- Maintenance trucks
- Water trucks
- Lube trucks
- Food transports

Dimensions

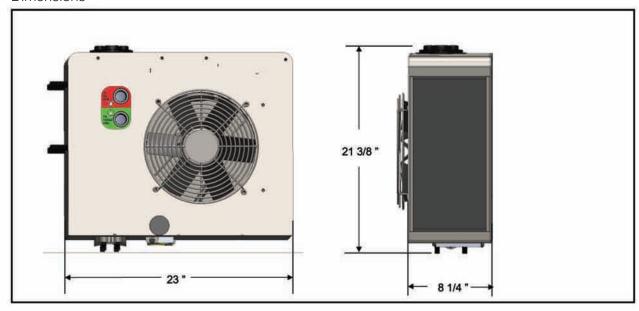

Distributed By:

TEJAS HYDRAULICS, INC. 800.256.2083 TEJAS.HYD.COM

