

SOLENOID OPERATED DIRECTIONAL VALVE
M10 SUBPLATE



FEATURES

This single-station subplate for mounting an industrial hydraulic directional control valve conforms to the National Fluid Power Association (NFPA) D10 mounting pattern. It accepts Northman valves in the SW-G10 Series. NPT and SAE Ports are available on the side or the bottom for Pressure, Tank, A and B connections.

M 10 – 10 – S – 2

1 **2** **3** **4** **5**

1 Series

M: Subplate

2 Mounting Style

10: NFPA Size D10

3 Port Size

10: 1-1/4" NPT or 1-5/8-12 SAE

4 Port Location

S: Side Ports

B: Bottom Ports

SB: Side and Bottom Ports

5 Port Thread

2: NPT

3: SAE St. Thd. O-Ring


SOLENOID OPERATED DIRECTIONAL VALVE M10 SUBPLATE

Dimensions

M10 - ** - B - *

MOUNTING SURFACE: ISO 4401-AB-03-4-A

UNIT: mm(inch)

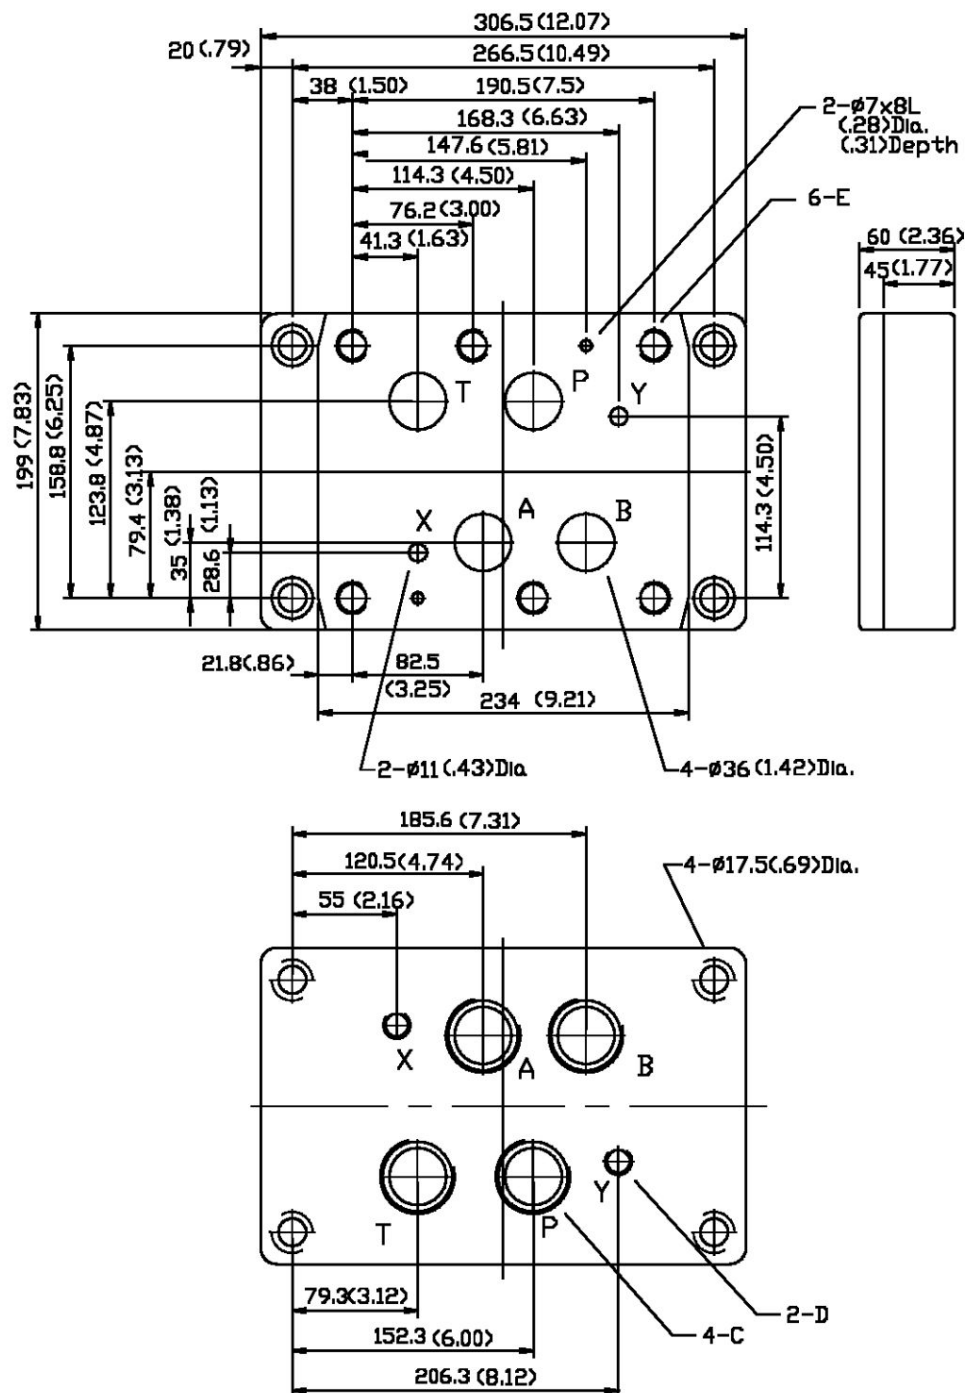

MODEL		C	D	E
M10-10-B	-2	1-1/4" NPT	3/8" NPT	3/4"-10 UNC

