



Magnetic Tank Cleaners

Multi Magnet Standard or Heavy Duty

Lenz magnetic tank cleaners pick up material that ordinary filters miss and thus maintain cleaner oil. The cleaner the oil, the less problems and expense incurred.

Exceptionally efficient, each unit is composed of a large ceramic magnet and two circular pole pieces.

Multi-magnet tank cleaners come in two models: standard and heavy-duty. Heavy-duty is recommended when support rods are long, power units are large or shipping abuse is anticipated. Although the magnetic unit is the same, heavy-duty is manufactured with a 5/8"-18 x 1" long thread solid steel support rod while the standard tank cleaner contains a 1/8" x 1" NPT long thread pipe size support rod.

To clean, simply use ordinary air hose using compressed air.

Order pipe plugs separately. Pipe plugs are optional and are furnished in 2 1/2" size. The minimum opening that will accommodate the unit is 2" pipe size or a hole approximately 2 1/4" in diameter. If desired, it can be installed in the cover of any opening larger than this.

Optional: Plug Part No. 40P (For Standard Rod)
HD40P (For Heavy Duty Rod)

Note** Special Rod Lengths Available

Demonstration of the Tank Cleaner's Magnetic Power





Standard Multi-Magnet 1000 Series

MODEL NO.		C	B	RESERVOIR CAPACITY
1001	IN MM	1.6" 41	6.6" 168	0-10
1002	IN MM	2.7" 69	7.7" 196	10-30
1003	IN MM	3.8" 97	8.8" 224	30-60
1004	IN MM	4.8" 122	9.8" 249	60-100
1005	IN MM	5.9" 150	10.9" 277	100-150
1006	IN MM	7" 178	12" 305	150-210
1007	IN MM	8" 203	13" 330	210-280
1008	IN MM	9.1" 231	14.1" 358	280-350

Heavy Duty Multi-Magnet 2000 Series

MODEL NO.		A	B	RESERVOIR CAPACITY
2001	IN MM	0.8" 20	5.8" 147	0-10
2002	IN MM	2" 51	7" 178	10-30
2003	IN MM	3" 76	8" 203	30-60
2004	IN MM	4.1" 104	9.1" 231	60-100
2005	IN MM	5.3" 135	10.3" 262	100-150
2006	IN MM	6.2" 157	11.2" 284	150-210
2007	IN MM	7.3" 185	12.3" 312	210-280
2008	IN MM	8.3" 211	13.3" 338	280-350

Steel Support Rods are 12L14
Stainless Support Rods are 303CD

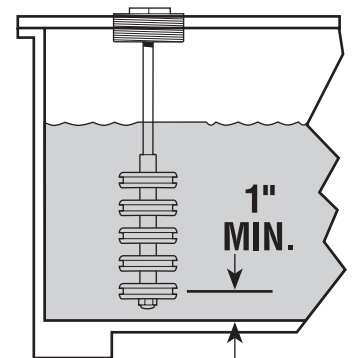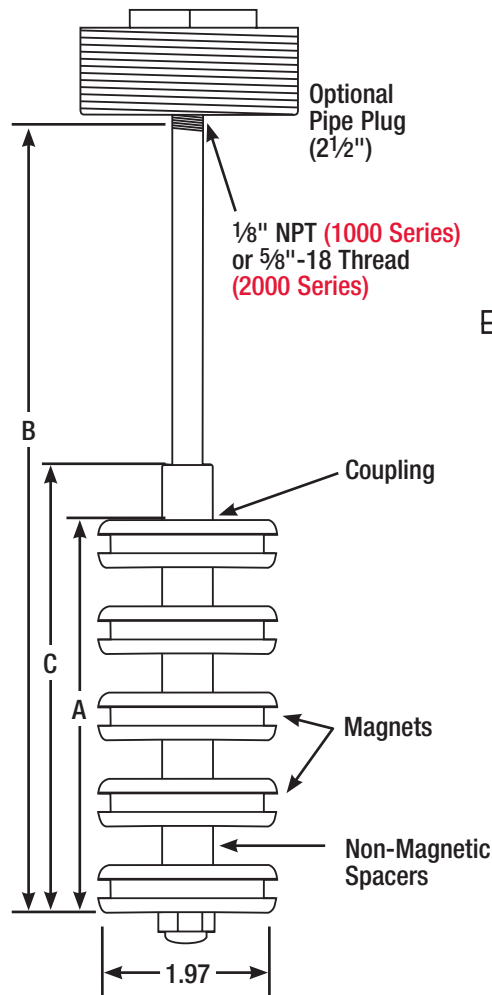

MULTI-MAGNET

TYPICAL INSTALLATION