

"Industry Accepted" Hydraulic Reservoirs

IMPORTANT FEATURES

- Hydro-Craft® Reservoirs meet or exceed all J.I.C. and ASLE Standards
- Scale-free welding process is used
- All Hydro-Craft Reservoirs are carefully fabricated from hot rolled steel plate and sheet, pickled and oiled, which eliminates the need for sand blasting and subsequent residue. Stainless steel also available.
- Fixed baffle properly slotted for correct oil circulation
- Single bolt end caps sized for maximum cleanout opening
- 3/4 NPT drain standard on one end cover
- Hydro-Craft Sight Level Gauge is plated and has extra large sight area with nonbreakable 2X magnifier
- Combination oil level and temperature gauge is standard. Temperature gauge features readings in Centigrade and Fahrenheit.
- Hydro-Craft Filler Breather Assembly is plated and guarded. It has a non-corrosive nylon strainer. Ten times the amount of air flow as comparable units now available.
- Four 2-1/4" diameter lift holes
- "L" Shaped Reservoirs come equipped with a full length piano hinge for opening lid and secure T-handle closure

AVAILABLE OPTIONS:

- Mounting Plates – Blank or Drilled & Tapped
- Coupling Guards
- Additional Sight Gauge
- Special duty and high temperature level gauge
- Additional Filler Breather
- Pipe Couplings – Whole or Half, SAE or NPT
- Down Lines
- Interior Paint
- Extra Drain
- Drip Pans, Stands, & Overhead Stands
- Lift Rings
- Removable Baffle

NOTE: These are non-pressurized reservoirs




Photos show just a few of the hundreds of standard and custom reservoirs fabricated by Hydro-Craft® each year.


"L" Shaped Reservoir Dimensional Data

RESERVOIR WEIGHTS

Part No.	lbs
HL-10	138
HL-18	180
HL-30	225
HL-45	250
HL-60	340
HL-80	685
HL-100	740
HL-120	1010
HL-150	1012
HL-200	1085
HL-250	1275
HL-300	1430
HL-400	1665
HL-500	1889

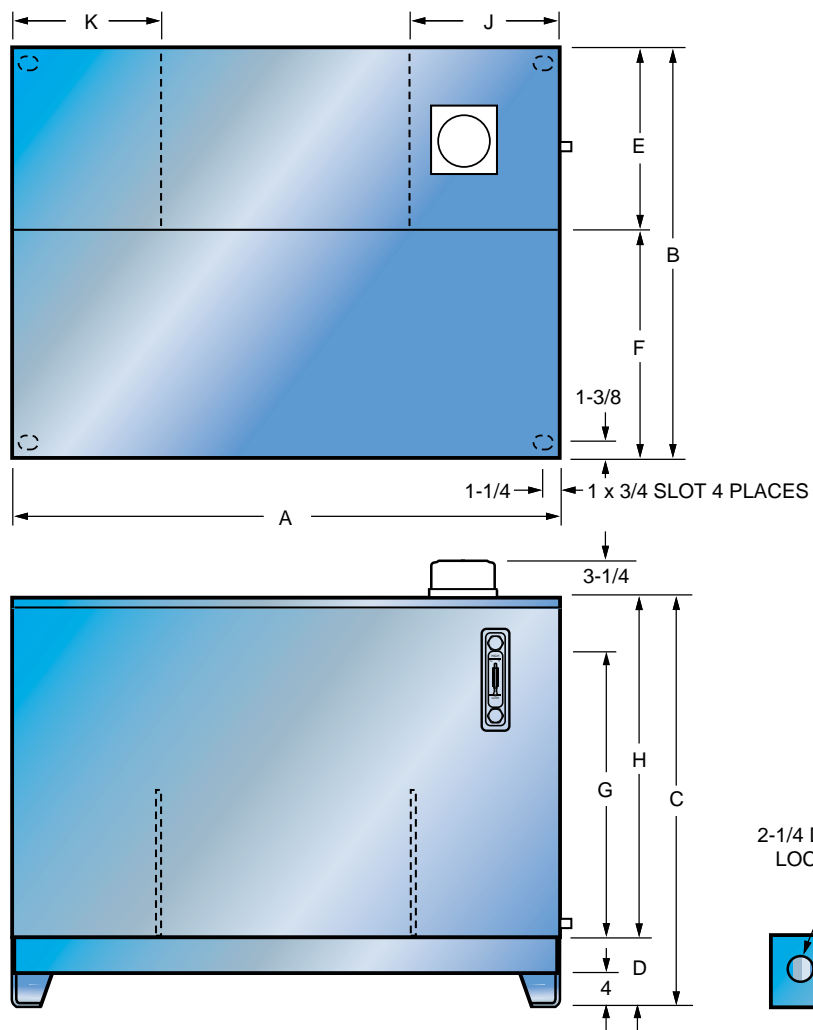

2-1/4 DIA. PICK UP
LOCATIONS (4)

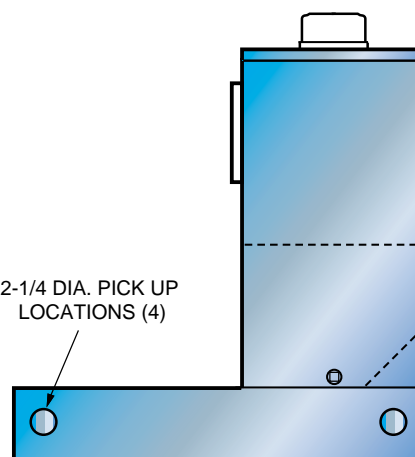

"L" SHAPED RESERVOIR SPECIFICATIONS

PART NO.	HL-10	HL-18	HL-30	HL-45	HL-60	HL-80	HL-100	HL-120	HL-150	HL-200	HL-250	HL-300	HL-400	HL-500
GALLON	10	18	30	45	60	80	100	120	150	200	250	300	400	500
A (L)	24	30	36	40	48	66	60	72	72	72	72	72	72	72
B (W)	25	30	30	30	36	36	48	48	48	48	48	48	60	60
C (H)	23	25	30	31	36	36	36	36	36	42	48	54	54	66
D	6-3/16	6-3/16	6-3/16	6-3/16	6-3/16	6-1/2	6-1/2	6-1/2	6-1/2	6-1/2	6-1/2	6-1/2	6-1/2	6-1/2
E	12-1/4	13-1/4	14-1/4	14-1/4	16-1/4	16-1/4	19-1/2	22-1/2	24-1/2	24-1/2	24-1/2	24-1/2	30	30
F	12-3/4	16-3/4	15-3/4	15-3/4	19-3/4	19-3/4	28-1/2	25-1/2	23-1/2	23-1/2	23-1/2	23-1/2	30	30
G	10	12	17	18	23	23	23	23	23	29	35	41	43	54
H	17	19	24	25	30	30	30	30	30	36	42	48	48	60
J	12	15	18	20	24	22	20	24	24	24	24	24	24	24
K	—	—	—	—	—	22	20	24	24	24	24	24	24	24

All dimensions are approximate in inches