

HYDRAULIC RESERVOIR, FILTER, & COOLING SYSTEM

ARC-60

HYDRAULIC RESERVOIR, FILTER,
AND COOLING SYSTEM



PART OF APSCO'S COMPLETE
LINE OF COOLING SYSTEMS



ARC-30S ARC-45 ARC-60

| BETTER PERFORMANCE | COMPACT DESIGN | INCREASED DURABILITY | EASY INSTALLATION |
|--|--|---|---|
| <ul style="list-style-type: none"> • Increased heat rejection • High efficiency fan design • Air flow path from side to front • Automatic cold-weather bypass • External access to adjustable pressure relief valve | <ul style="list-style-type: none"> • Narrow width, less than 10" • Minimal fan clearance required (2" inlet side) • Compact design so you can install in a space of less than 12" • 10 micron filter element | <ul style="list-style-type: none"> • Low maintenance internal plumbing design • Manifold design for fewer parts to fail • Only one low pressure hydraulic hose • Corrosion resistant design stainless steel/aluminum construction | <ul style="list-style-type: none"> • Rear studs for side rail mounting • SAE ports allow for easier piping alignment and minimize potential for leaks • SAE port adapter fittings available for your convenience |


SEE OUR COMPLETE LINE AT APSCOPOWER.COM

Sales (918) 622-5600 • Fax (918) 622-5469

Email: sales@apscopower.com



ARC-60 APSCO RESERVOIR COOLER SPECIFICATIONS

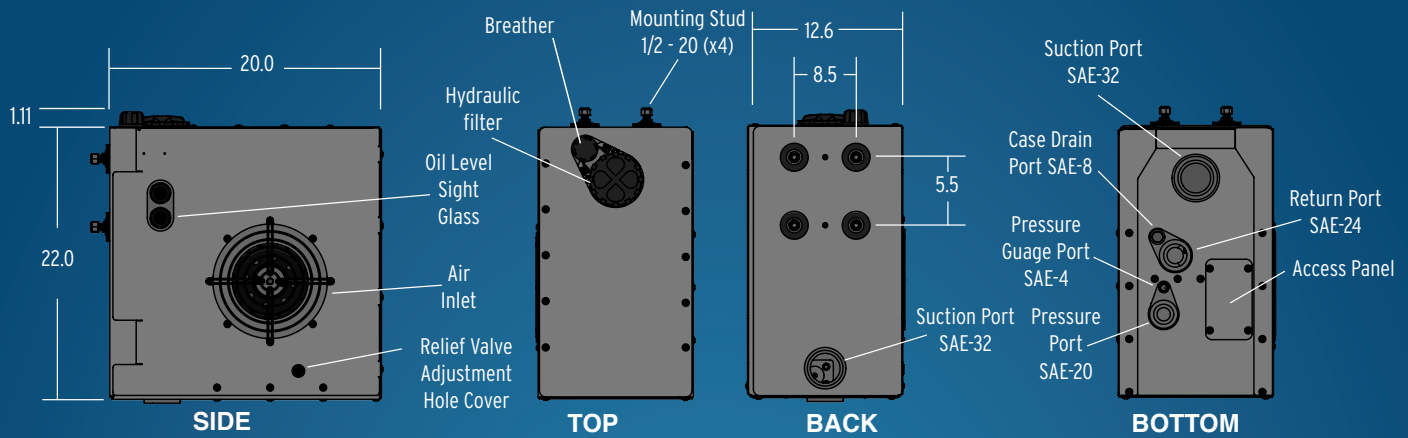

| Model | Flow Rate (GPM) | Reservoir Size (Gallons) | Pressure (PSI) | Heat Rejection (HP) |
|--------|-----------------|--------------------------|----------------|---------------------|
| ARC-60 | 60 Max | 6 | 4,000 Max | 28 |

- Capacity60 GPM
- Slimline or BoxSlimline
- Reservoir Tank Size 6 Gallon
- Back Suction SAE-32 Female
- Bottom Suction..... SAE-32 Female
- Pressure Port SAE-20 Female
- Return Port SAE-24 Female
- Relief Valve Adjustable 500-3000 PSI (standard)
- Fan Hydraulic Drive (1.2 GPM)
- Filter..... Tank top design w/integral breather, 25 PSI bypass
- Filter Element10 Micron, element easily serviceable from top
- Oil Level Sight Glass..... Dual bulls eye
- Basic Dimensions (L x W x H) 22 x 13 x 22"
- Cooler Bypass Cold Start Up - 60 PSI high flow
- Case Drain SAE-8 Female
- Finish Stainless Steel exterior brushed finish
- Pressure Gauge Port SAE-4 Female
- Weight 140 LBS
- Heat Rejection28 HP at 60 GPM with 80°F exiting temp. differential

FITTINGS NOT INCLUDED. SEE ACCESSORIES LIST FOR AVAILABLE FITTINGS

SEE OUR COMPLETE LINE AT APSCOPOWER.COM

Sales (918) 622-5600 • Fax (918) 622-5469

Email: sales@apscopower.com

