GAS ENGINE ADAPTERS

Standard Material:

Cast Aluminum

PEM-HH FLANGE

Pump Gas Engine Adapters (Bell Housings) are designed to assure proper shaft alignment between the gasoline engine and your hydraulic pump. They also reduce assembly cost over using a foot mounting bracket or riser.

Standard Features:

- · Light weight High strength
- Drive coupling access hole
- Safety orange removable cover for coupling access hole
- Gas Engine Adapters are designed to be used with gas engines with horizontal shafts only.


ACCESS OPENING WITH COVER PROVIDED ACCESS OPENING IS BETWEEN THE (2) 30° OFFSET HOLES ACCESS OPENING IS BETWEEN THE (2) 30° OFFSET HOLES ACCESS OPENING IS BETWEEN THE (2) 30° OFFSET HOLES ACCESS OPENING WITH ACCESS OPENING



NOTE: All dimensions are inches.

Ph : 920-682-6877 Fx : 920-684-7210

Gas Engine Adapter - PEM-HH Flange (inches)												
Part No.	Pump Type	Pump Mounting Flange	MAX Coupling Dia	XAJ Bolt Circle	XAK Pump Pilot	XBF Mounting Holes (NC)	M Face to Face	Inside Clearance				
6017	SAE A	2 Bolt	4.00	4.19	3.25	3/8-16	5.62	4.50				

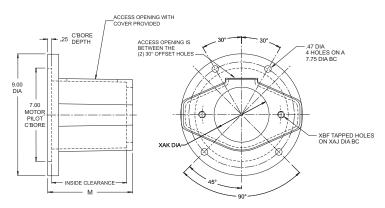

NOTE: All dimensions are inches. Standard metric series pump flanges also available - Consult factory.

Gas Engine Adapter - PEM-HH Flange (inches)												
Part No.	Pump Type	Pump Mounting Flange	MAX Coupling Dia	XAJ Bolt Circle	XAK Pump Pilot	XBF Mounting Holes (NC)	M Face to Face	Inside Clearance				
196199	SAE A	2 Bolt	3.50	4.19	3.25	3/8-16	7.00	5.12				
196399	SAE B	2 Bolt 4 Bolt	3.50	5.75 5.00	4.00	1/2-13	7.00	5.12				
196599	SAE C	2 Bolt	3.50	7.12	5.00	5/8-11	7.00	5.12				

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

